


# PCI Express x1 Card > 2 x external FireWire B + 1 x external FireWire A

## Description

This PCI Express card by Delock expands the PC by two external FireWire 800 ports as well as one external FireWire 400 port. Different FireWire devices such as external enclosure, digital cameras, camcorder, adapter etc. can be connected to this card.

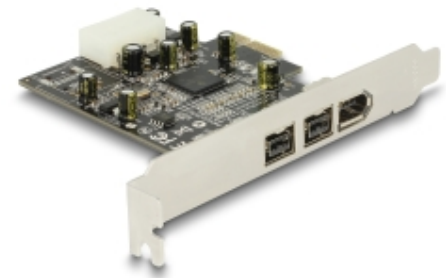

**Item no. 89153**

EAN: 4043619891535

Country of origin: China

Package: Retail Box

## Technical details

- Connector:
  - external:
    - 2 x FireWire 1394B 9 pin female
    - 1 x FireWire 1394A 6 pin female
  - internal:
    - 1 x PCI Express x1
    - 1 x 4 pin power connector
- Chipset: Texas Instruments
- Data transfer rate:
  - FireWire A up to 400 Mb/s
  - FireWire B up to 800 Mb/s
- Supports OHCI specifications V1.0 and 1.1
- Hot Swap, Plug & Play


## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64/11, Linux ex Kernel 2.6.x / Kernel 4.x.x
- PC with one free PCI Express slot
- Power supply with a free 4 pin power connector

## Package content

- PCI Express card
- 1 x cable FireWire A 6 pin male to FireWire A 4 pin male, length ca. 150 cm
- User manual

## Images



## General

Supported operating system:	Linux Kernel 2.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
-----------------------------	---

## Interface

External:	1 x FireWire 1394A 6 pin female 2 x FireWire 1394B 9 pin female
Internal:	1 x 4 pin power connector 1 x PCI Express x1

## Technical characteristics

Chipset:	Texas Instruments
----------	-------------------

### Manufacturer information

---

Street	Beeskowdamm 13/15
Postal code	14167
City	Berlin
Country	Deutschland
E-Mail	info@delock.de
Website	www.delock.de