

NETGEAR ProSAFE Unmanaged Switch - JGS524 - 24 Gigabit Ethernet poorten 10/100/1000 Mbps



Merk : NETGEAR

Artikelcode: JGS524-200EUS

Productnaam : ProSAFE Unmanaged Switch - JGS524 - 24 Gigabit Ethernet poorten 10/100/1000 Mbps

ProSAFE Unmanaged Switch - JGS524 - 24 Gigabit Ethernet poorten 10/100/1000 Mbps
 NETGEAR ProSAFE Unmanaged Switch - JGS524 - 24 Gigabit Ethernet poorten 10/100/1000 Mbps. Switch type: Unmanaged. Type basis-switching RJ-45 Ethernet-poorten: Gigabit Ethernet (10/100/1000), Aantal basis-switching RJ-45 Ethernet-poorten: 24. Full duplex. MAC-adrestabel: 8000 entries, Switchingcapaciteit: 48 Gbit/s. Netwerkstandaard: IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x. Rack-montage

Beheerfuncties		Prestatie	
Switch type *	Unmanaged	Geluidsniveau	40 dB
Quality of Service (QoS)	✓	Mean time between failures (MTBF)	87600 uur
Poorten & interfaces		Energie	
Aantal basis-switching RJ-45 Ethernet-poorten *	24	Stroombron *	AC
Type basis-switching RJ-45 Ethernet-poorten *	Gigabit Ethernet (10/100/1000)	AC-ingangsspanning	100 - 240 V
		AC-ingangsfrequentie	50 - 60 Hz
		Stroomverbruik (typisch)	17,9 W
Netwerk		Power over Ethernet (PoE)	
Netwerkstandaard *	IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x	Power over Ethernet (PoE) *	✗
10G support *	✗	Eisen aan de omgeving	
Full duplex	✓	Bedrijfstemperatuur (T-T)	0 - 50 °C
Datastroombeheer	✓	Temperatuur bij opslag	-20 - 70 °C
Ethernet LAN, data-overdrachtsnelheden	10,100,1000 Mbit/s	Relatieve vochtigheid in bedrijf (V-V)	5 - 90 procent
		Luchtvochtigheid bij opslag	10 - 95 procent
Data-uitwisseling		Gewicht en omvang	
Ondersteunde data-overdrachtsnelheden	10/100/1000 Mbps	Gewicht	2,4 kg
Switchingcapaciteit *	48 Gbit/s	Logistieke gegevens	
MAC-adrestabel *	8000 entries	Code geharmoniseerd systeem (HS)	85176990
Max. overdrachtssnelheid	2 Gbit/s	Overige specificaties	
Design		Latentie	20 µs
Rack-montage *	✓	Afmetingen (B x D x H)	330 x 207 x 43 mm
Stapelbaar *	✗	Connectiviteitstechnologie	Bedraad
Kleur van het product	Blauw	Stroomvoorziening	100~240V; 50-60Hz;
Certificering	CE, FCC 15 A, VCCI A, EN 55022 (CISPR 22) A, EN 50082-1, EN 55024, C-Tick	Connectivity LEDs	✓



0606449064261




606449064261



4055895865070



4058829201838

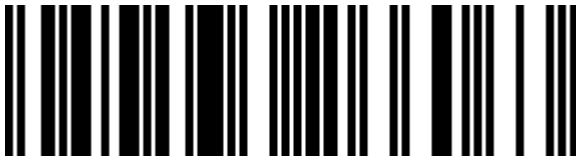

5054533266063



5053460697599



5425655887809



0657968318151



657968318151

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.