TRENDnet®

USB 3.0 to Gigabit Ethernet Adapter
TU3-ETG

- Adds a Gigabit Ethernet port to your computer
- SuperSpeed USB 3.0 port supports Full Duplex 2 Gbps speeds
- Compact energy efficient design
- Windows and Mac compatible
- Up to 70% energy saving GREENnet technology
- Compatible with older USB 2.0 and 1.1 ports

TRENDnet's compact USB 3.0 to Gigabit Ethernet Adapter, model TU3-ETG, quickly adds a Gigabit Ethernet port to a Windows or Mac computer. A SuperSpeed USB 3.0 port supports Full Duplex 2 Gbps transfer speeds. The TU3-ETG is compatible with older USB 2.0 and 1.1 ports.

Ease of Use

Easy Setup
Quick intuitive setup

Operating Systems
Compatible with Windows, Mac, and Linux operating systems

LED Indicators
LED indicators confirm connectivity and transfer speeds

USB Powered
No bulky power brick—compact adapter powered by USB port

USB Compatibility
Compatible with older USB 2.0 and 1.1 ports

Performance

Gigabit Ethernet
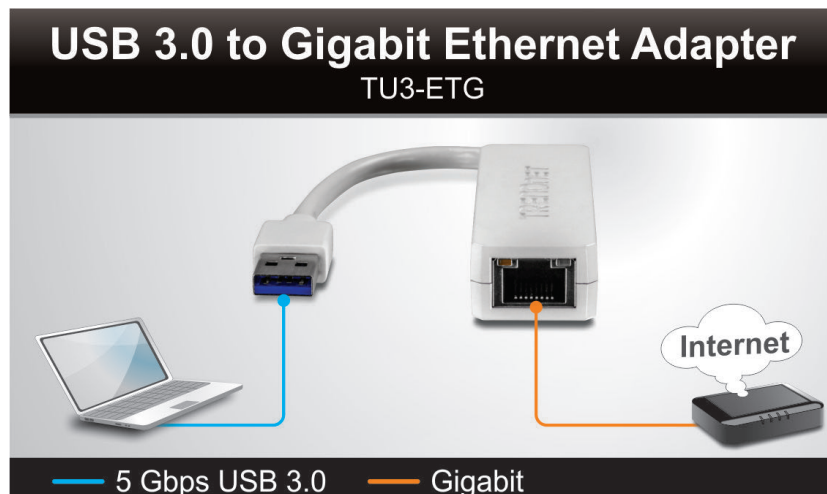Full Duplex 2 Gbps Ethernet speeds

USB 3.0
USB 3.0 port maintains Full Duplex 2 Gbps Ethernet speeds

Energy Efficient
Up to 70% energy saving GREENnet technology

Networking Solutions

USB 3.0 to Gigabit Ethernet Adapter
TU3-ETG

— 5 Gbps USB 3.0   — Gigabit

TRENDnet®

USB 3.0 to computer

Gigabit Port

Specifications

Standards

- USB 3.0
- USB 2.0
- USB 1.1
- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3ab
- IEEE 802.3az

Device Interfaces

- 1 x type-A (m) USB connector
- 1 x Gigabit Port
- LED indicator

Maximum Data Rate

- Up to 2 Gbps (full duplex mode)

Special Features

- Wake-on-LAN Support
- Energy saving GREENnet technology

System Compatibility

- Windows® 8, 7, Vista, XP; OS X 10.6 - 10.8

Power Consumption

- Consumption: 1.3 Watts (Max. bus powered)

Operating Temperature

- 0 - 40°C (32 - 104°F)

Operating Humidity

- Max. 90% non-condensing

Certifications

- CE
- FCC

Dimensions

- 72 x 25 x 15 mm (2.8 x 1.0 x 0.6 in.)

Weight

- 25 g (0.9 oz)

Warranty

- 2 year limited

Package Contents

- TU3-ETG
- Multi-Language Quick Installation Guide
- CD-ROM (Driver & User's Guide)